



# MEI

MINNESOTA ELEVATOR, INC.


19336 607th Ave • Mankato, MN • 56001 PH: 507.245.3060 • FAX: 507.245.3956

[www.minnesotaelevator.com](http://www.minnesotaelevator.com) • An EOE/AA Employer

**MEI is a North American leader in the design and production of elevator systems for the hydraulic and geared traction market. Below is an overview of MEI's capabilities.**

		Traction Geared	Borehole	Holeless Twin Jack - Single Stage	Holeless Twin Jack - Two Stage	Roped Hydro Twin Jack	Roped Hydro Cantilevered
<b>Passenger</b>	<b>2,100 lb - 4,500 lb</b>	✓	✓	✓	✓	✓	✓
	Standard & Custom Cabs	✓	✓	✓	✓	✓	✓
	Front & Rear Openings	✓	✓	✓	✓	✓	✓
	Maximum Travel (ft)	No Limit	75	20	40	100	75
	Maximum Car Speed (FPM)	500	200	200	200	200	200
	Class A, C1 & C3 Loading	✓	✓	✓	✓	✓	Class A
	<b>5,000 lb - 20,000 lb</b>	✓	✓	✓	✓	✓	✗
	Standard & Custom Cabs	✓	✓	✓	✓	✓	✗
	Front & Rear Openings	✓	✓	✓	✓	✓	✗
	Maximum Travel (ft)	No Limit	75	20	40	100	✗
Maximum Car Speed (FPM)	100-500	200	200	200	175	✗	
Class A, C1 & C3 Loading	✓	✓	✓	✓	✓	✗	
<b>Freight</b>	<b>4,000 lb - 6,000 lb</b>	✓	✓	✓	✓	✓	✗
	Class A, B, C1, C2, C3 Loading	✓	✓	✓	✓	✓	✗
	Front & Rear Openings	✓	✓	✓	✓	✓	✗
	Maximum Travel (ft)	No Limit	75	20	40	100	✗
	Maximum Car Speed (FPM)	400-500	200	200	200	200	✗
	<b>6,500 lb - 15,000 lb</b>	✓	✓	✓	✓	✓	✗
	Class A, B, C1, C2, C3 Loading	✓	✓	✓	✓	✓	✗
	Front & Rear Openings	✓	✓	✓	✓	✓	✗
	Maximum Travel (ft)	No Limit	75	20	40	100	✗
	Maximum Car Speed (FPM)	150-350	200	175	175	175	✗
	<b>20,000 lb - 40,000 lb</b>	✓	✓	✗	✗	✓	✗
	Class A, B, C1, C2, C3 Loading	✓	✓	✗	✗	✓	✗
	Front & Rear Openings	✓	✓	✗	✗	✓	✗
	Maximum Travel (ft)	No Limit	75	✗	✗	100	✗
	Maximum Car Speed (FPM)	50-125	100	✗	✗	100	✗
	<b>40,000 lb - 60,000 lb</b>	✗	✓	✗	✗	✗	✗
Class A, B, C1, C2, C3 Loading	✗	✓	✗	✗	✗	✗	
Front & Rear Openings	✗	✓	✗	✗	✗	✗	
Maximum Travel (ft)	✗	75	✗	✗	✗	✗	
Maximum Car Speed (FPM)	✗	100	✗	✗	✗	✗	

Please Note: MEI may be able to exceed capabilities listed.

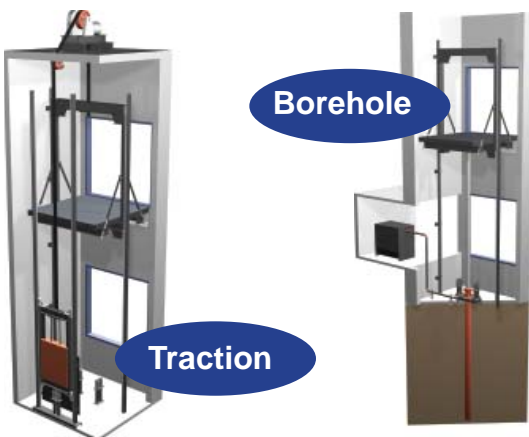

## ***Power Units***

Submersible and Dry mount/belt-driven designs available. Submersible units can be quoted and ordered on-line. MEI's website is equipped with an on-line quoting and ordering tool for our customers. This on-line service is available for Submersible Power Units.



## ***Elevator Components***

MEI offers a variety of elevator components such as: Oil Coolers, Limit Switches, Pully Bullys (a pump/motor hoist for submersible power units), Silencers, and much more. Same day shipment is available in most cases.



**Contact an MEI Product Line Sales Representative at 507-245-3060 for more information.**

**Traction Products • Borehole Products**

**Holeless & Roped Hydro Products • Power Units • Components**